



Pebble™
Bluetooth Environment Monitor

Changing Batteries

Step by Step Guide

Introduction

Pebble is powered by 2xAA batteries producing 3 volts in series and providing approximately 1200 mAHs of battery life. This should enable Pebble to be powered for approximately 5 years in normal conditions and use.

In certain instances the battery life of Pebble can be affected, such as when logging time is shortened, many downloads of data occur during the course of one day or where Pebble is placed in environmental extremes, such as conditions below 0° Celsius or above 40° Celsius. Each of these factors may reduce the battery life of Pebble.

Assisting you each step of the way

This brief Guide is to assist you in changing the batteries should this be required. While the process is not complicated and should only take a few minutes, there are some things you ought to be aware of during the process which may not be obvious.

BLUE MAESTRO'S STANDARD LICENSE AND DISCLAIMER

Copyright ©2017 Blue Maestro Limited. All Rights Reserved. The copyright in the software to which this document relates and in this document belong exclusively to Blue Maestro Limited and no permission to use, copy, modify, and distribute this software or this documentation is permitted unless with the express prior written authorisation of Blue Maestro Limited. The license to use the software to which this document relates is granted so long as such software resides in hardware provided by Blue Maestro Limited.

No claims, representations or warranties, whether expressed or implied, including but not limited to warranties of merchantability, fitness for a particular purpose, of title, or of non-infringement of third party rights, are made by Blue Maestro as to the safety, reliability, durability or performance of Blue Maestro's products. Blue Maestro is not responsible for any liabilities resulting from negligence, misuse, modification, or alterations to the product by the user. Furthermore, Blue Maestro accepts no liability whatsoever for the safety, reliability, durability or performance of any of its products. IN NO EVENT, REGARDLESS OF CAUSE, SHALL BLUE MAESTRO BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE OR CONSEQUENTIAL DAMAGES OF ANY KIND, WHETHER ARISING UNDER BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), STRICT LIABILITY OR OTHERWISE, AND WHETHER BASED ON THIS AGREEMENT OR OTHERWISE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

User assumes responsibility for correct operation of the product and any software associated with it. User assumes responsibility for determining the suitability of the product to the user's needs, for configuring and using the product to meet those needs, and for the proper placement/location of the product in the environment it is being used. User assumes responsibility for verifying and interpreting results obtained from product use.

BLUE MAESTRO RESERVES THE RIGHT TO REVISE ITS STANDARD LICENSE AND DISCLAIMER WITHOUT NOTICE AT ANY TIME.



Pebble™ Bluetooth Environment Monitor

Step One - Remove rubber feet and unscrew

You will notice 3 rubber feet on the bottom of Pebble. Remove these with your fingers or a suitable instrument and you will find a philips screw behind each of them.




Remove the rubber feet and unscrew

Once the screws are removed you will be able to remove the top of Pebble exposing the electronics and the 2xAA batteries.

Step Two - Replace the batteries

The batteries face opposing directions. That is, one has its negative end facing one way while the other has its positive end facing that way.

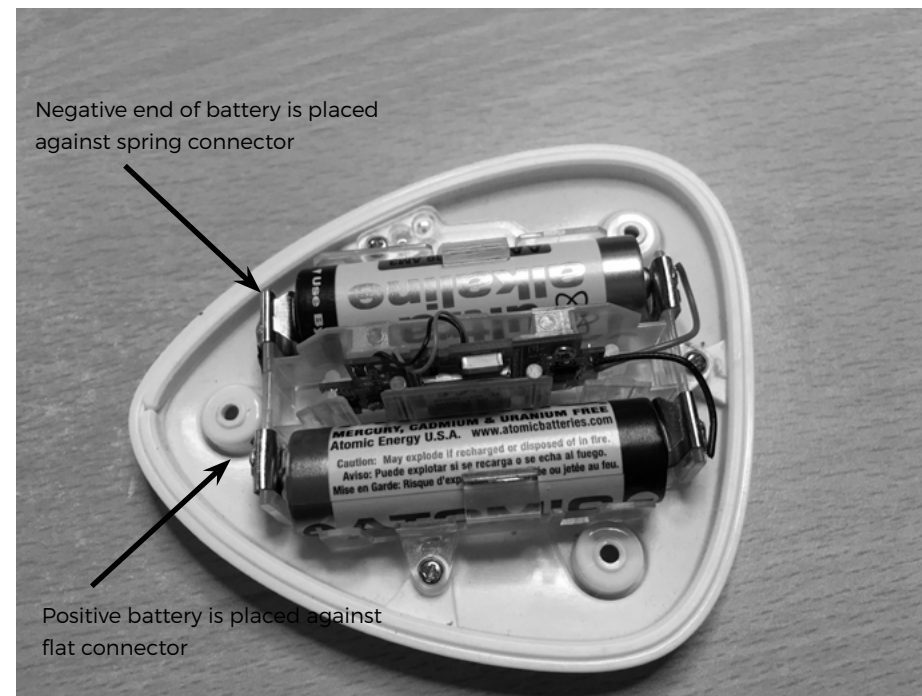

Place batteries in opposing directions

The battery connectors have a spring end and a flat end. The negative end of the battery always goes on the spring end and the positive end of the battery goes on the flat end.

CAUTION: Putting the batteries in the wrong way can cause damage to Pebble. When the batteries are put in the correct way the LED indicator that can be seen in the bottom of Pebble should blink three times.

Step Three - Screw together and replace rubber feet

Place the top cover. It should fit closely on the bottom. If not, check the batteries are placed firmly in their holder. Screw together and replace feet. **PLEASE DO NOT OVERTIGHTEN THE SCREWS SINCE THIS MAY CAUSE THE BRASS INSERTS TO LOOSEN IN THE DEVICE.**

Finished

Pebble should be operating normally. If it is not, the first thing to check is that the batteries are seated in the correct orientation and that the LED blinks when the batteries are inserted.

If you have any issues with these instructions, get in contact with support@bluemaestro.com who may be able to assist.

www.bluemaestro.com